


DEPENDABLE DUAL ELECTRICAL SYSTEMS

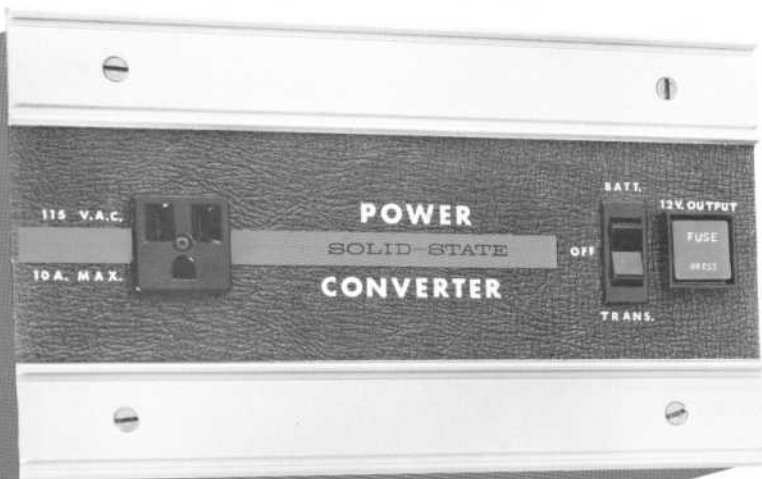

PANEL

POWER CONVERTER

Designed for Tent Campers from Progressive Dynamics

This new, economical power converter is specifically designed for tent campers. Easily mounts flush into closet wall or cupboard to save valuable space. Eliminates dual 12 volt and 115 volt power source problems by converting 115 volt to 12 volt power.

FEATURES

- ★ Designed to be flush mounted in the wall or cupboard to save space.
- ★ Easy to install.
- ★ 12 Volt output fuse or circuit breaker provided to protect against overloads.
- ★ UL approved.
- ★ The transfer switch allows the camper electrical system to be switched to transformer operation. Center (off) position removes all power when towing.
- ★ 115 Volt convenience outlet provided.



PROGRESSIVE DYNAMICS, INC.

P.O. Box 168 507 Industrial Road
Marshall, Michigan 49068
Phone (616) 781-4241


specifications for

model no. PD 684

model no. PD 685



NOMINAL INPUT A/C VOLTS	115 VAC	115 VAC
INPUT AMPS	60 Hz (cycles)	60 Hz (cycles)
OUTPUT VOLTS	12 VDC	12 VDC
OUTPUT AMPS	1.5	3
MOUNTING	Flush in cupboard or closet wall	Flush in cupboard or closet wall
DIMENSIONS	8-1/2" L x 2-1/4" D x 5" H	8-1/2" L x 2-1/4" D x 5" H
WEIGHT	3.2 Lbs.	4 Lbs.

WIRING DIAGRAM

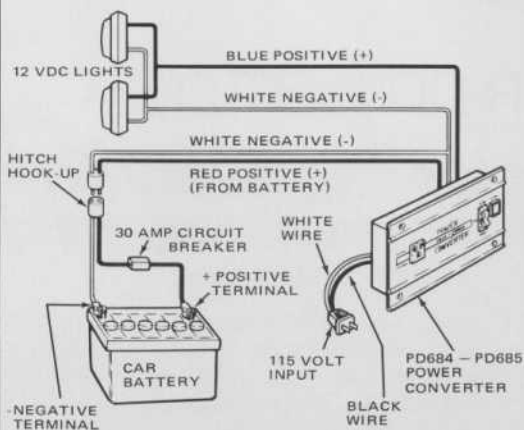

INSTALLATION

FOR FLUSH MOUNTING A 4" x 8" CUT-OUT IS REQUIRED. MINIMUM CLEAR AREAS REQUIRED AS INDICATED

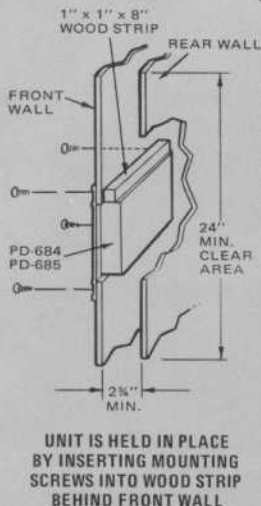

WHY THE TREND TO CONVERTERS?



More and more, vacationers are seeking the solitude and charm of unimproved wilderness campsites . . . and, at the same time, DEMANDING MODERN CONVENIENCES in their recreational vehicles!

Where does the electricity come from to operate these conveniences?

In a modernized park, where 115 volt AC power is available, 12 volt appliances such as lights, water pumps and fans may be operated directly from the power converter and conserve battery power by switching the battery/transformer switch on the converter to "transformer" position.

In the wilderness, where 115 volt AC is not available, the battery/transformer switch on the

converter should be moved to "Battery" position and all 12 volt accessories will now operate from your battery.

Must a recreational vehicle and all its appliances be wired for both 115 volt AC and 12 volt DC to be truly self-contained?

The answer is "NO".

The solution is 12 volt DC wiring throughout the R.V. and a PROGRESSIVE DYNAMICS POWER CONVERTER that allows maximum use of either power source at the R.V. electrical inlet.

A Progressive Dynamics POWER CONVERTER provides a dual electrical system without the cost and inconvenience of dual wiring.



PROGRESSIVE DYNAMICS, INC.
P.O. BOX 168 507 INDUSTRIAL ROAD MARSHALL, MICHIGAN
Phone (616) 781-4241 49068