




# PROGRESSIVE DYNAMICS, INC.

## PD4045K TROUBLE SHOOTING INFORMATION


Note: Trouble shooting this unit involves exposure to live 120 VAC and should only be attempted by a qualified technician.

1. Remove front cover to expose the AC and DC wiring compartment as shown below.

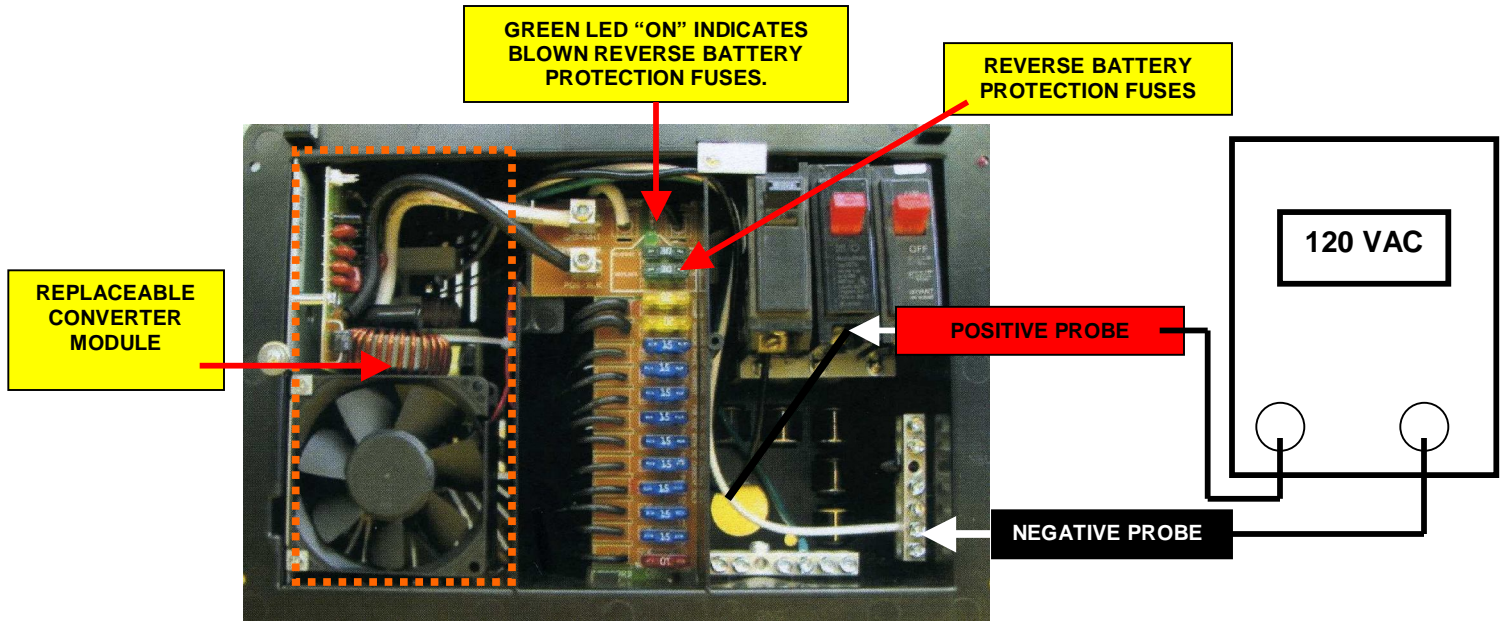

### TEST PROCEDURE


2. Connect the RV to Shore Power, then using a digital voltmeter check to see that 120 VAC is available to power the converter section as shown above. Note: place Positive Probe on the circuit breaker to which the BLACK WIRE from the converter section is connected.
3. Check to see if the Reverse Battery Fuses are blown, if so replace them. The PD4045K requires two (2) 30-amp fuses). Note: The only thing that will blow these fuses is if the battery leads were connected in reverse, even for a second.
4. With the AC power still "ON" you must now test to see if the Converter Section of the system is operating properly as follows:
  - A. Remove the Reverse Battery Protection Fuses (see next page).
  - B. Using a digital voltmeter check to see that the converter output reads between 13.3 and 13.9 volts DC (See photo on next page). If the voltage is in this range, the converter is operating properly. If the voltage is above or below this voltage, the converter section has failed and must be removed and replaced.

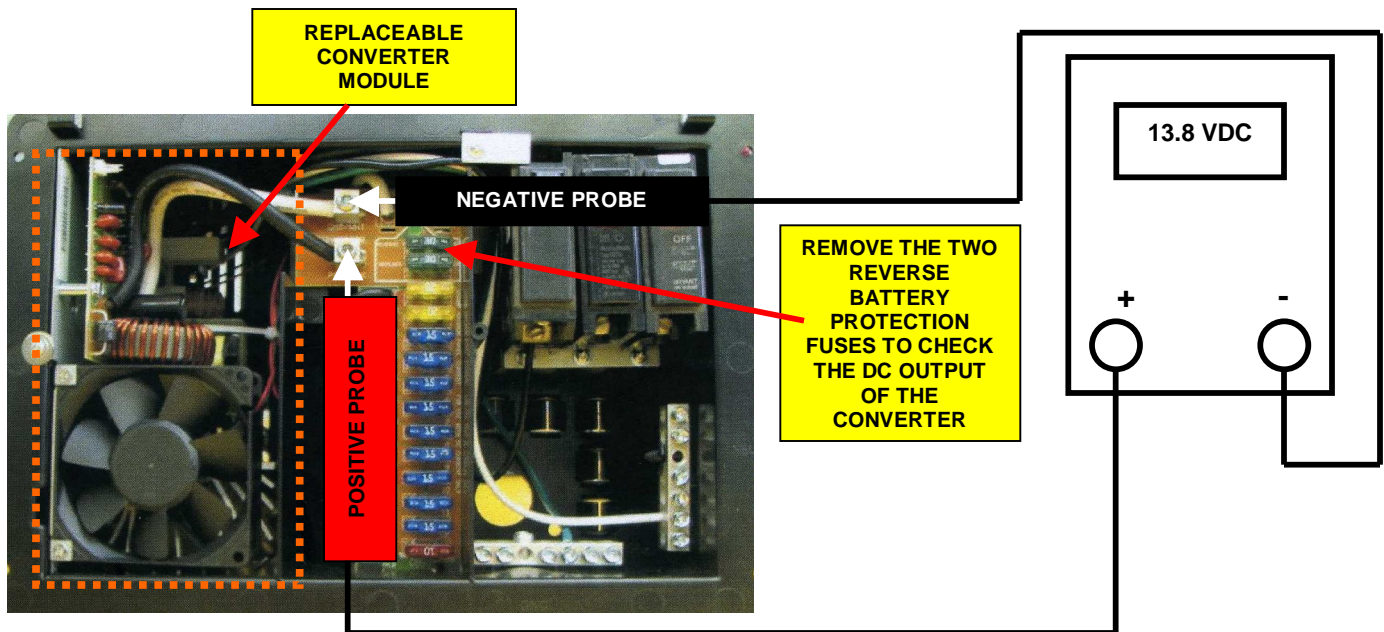

**NOTE: DO NOT REMOVE THE ENTIRE AC/DC DISTRIBUTION PANEL FROM THE RV, REMOVE ONLY THE CONVERTER MODULE AS FOLLOWS:**

### REMOVING THE CONVERTER MODULE

1. Disconnect all AC power from the RV.
2. Disconnect the converter AC Power Black, White and Green power wires from the Circuit breaker, Neutral and Ground busses.
3. Disconnect the Black and White DC output wires from the DC Fuse Panel.
4. Remove two Hold Down Screws, and then slide out the CONVERTER MODULE.

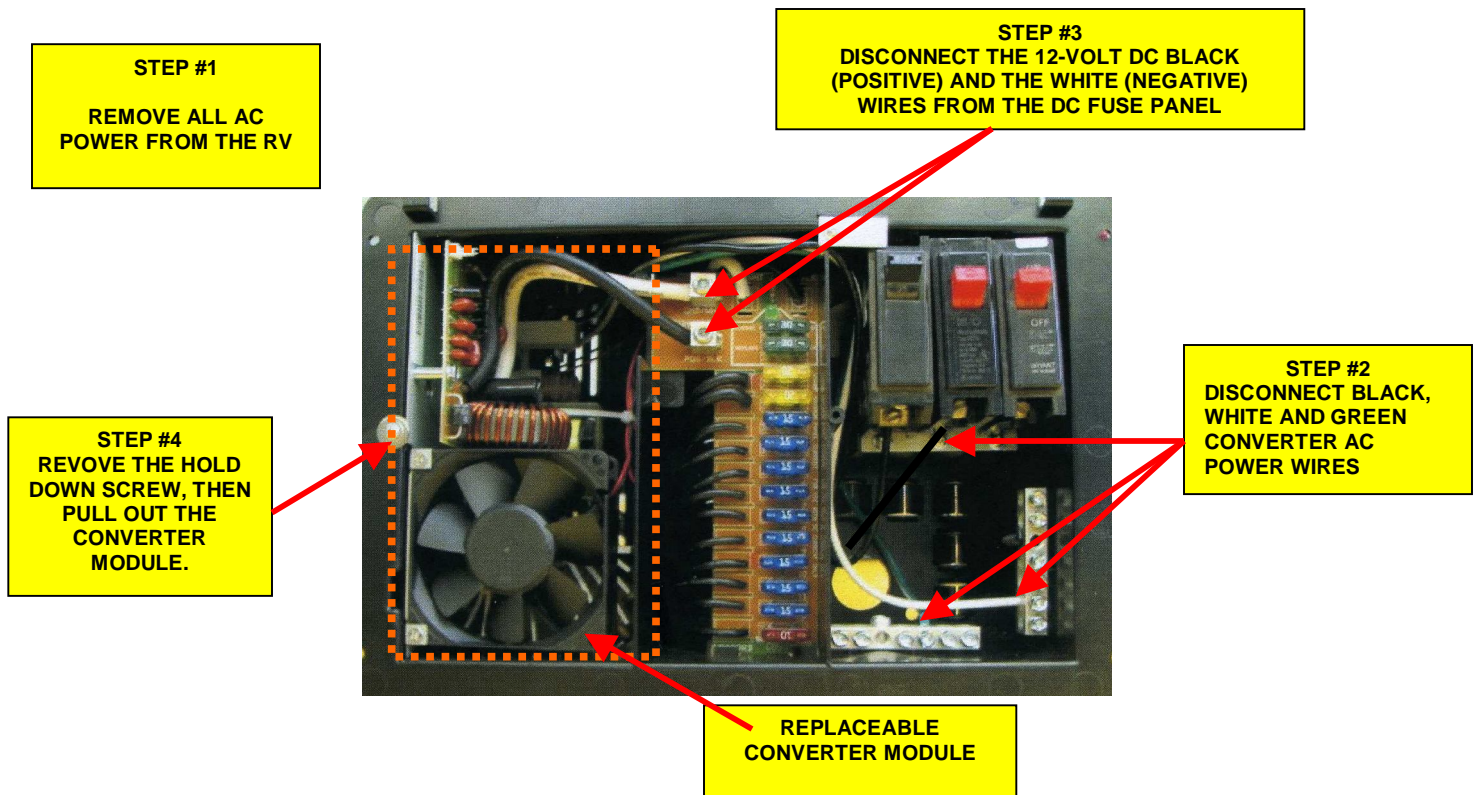

## REPLACING THE CONVERTER MODULE

**Note:** At this time, there is one Replacement Converter Module available for this series.

**Model # - PD4045CS (45-Amp Converter Module, with built-in Charge Wizard)**

1. Slide the new Converter Module into the Distribution Panel and reinstall the hold down screws.
2. Reconnect the Black and White DC output wires on the DC Fuse Panel.
3. Reconnect the Converter AC Power wires (Black, White and Green) their proper locations on the Circuit breaker (Black), Neutral Bus (White) and Ground Bus (Green).
4. Apply AC power to the RV and test to see if the new converter is operating properly using the test procedures above.

Progressive Dynamics, Inc.  
Service Department  
507 Industrial Road  
Marshall, MI 49068

Phone 269-781-4241 Ext. 143

E-mail [service@progressivedyn.com](mailto:service@progressivedyn.com)

